

General Description

The DE-SWADJ 3 is designed to be the easiest possible way to utilize the benefits of switch-mode power when you need an unusual or easily changed voltage. The DE-SWADJ family is pin-compatible with the common 78XX family of linear voltage regulators, and can step down to 3v to 13v with no external circuitry required. It has integrated decoupling capacitors, so external capacitors are not generally necessary.

The DE-SWADJ 3 operates over a wide input voltage range, from 5v to 35v, at up to three amps of continuous output current. Maximum power output is 25W. Efficiencies are up to 96% (Figure 2). Ripple is less than 1% of output.

The DE-SWADJ 3 works on a breadboard, making it an ideal solution for prototyping and one-off circuits.


Features

- Drop-in replacement for any of the LM78XX regulators
- Outputs any voltage between 3v and 13v
- Adjustment is by a 25-turn potentiometer, making it easy to dial in exactly the right output
- 5 to 35V input voltage
- Up to 25W output power
- 3A continuous output current²
- Efficiency up to 96%
- Integrated bypass capacitors
- Integrated heat sink
- Weights only 10g

Applications

- Battery powered applications
- Robots
- Battery charging and maintenance
- Point of load voltage regulation
- Any application needing a nonstandard voltage
- Overclocking and over or under-volting standard products for more performance or less power draw

Figure 1

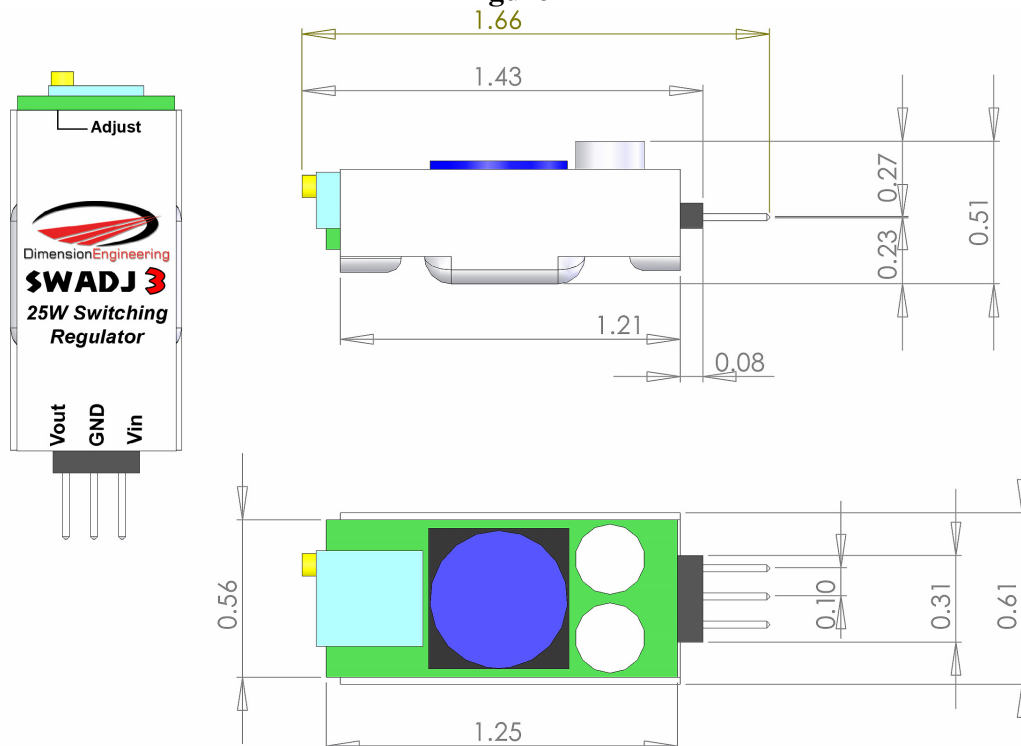

(Measurements are in inches.)

Typical Performance Characteristics

The device can be expected to perform as characterized within these parameters

Characteristic	Min	Typical	Max
Input voltage	5V		33.6V
Output Voltage, Min		3v	
Output Voltage, Max	12v	12.5v	13v
Output Power			25W
Output Current ¹	0A		3A
Output Ripple	10mV	25mV	40mV
Efficiency (See Figure 2)	66%	90%	96%
Power dissipation	120mW	1.12W ²	2W
Switching frequency		500kHz	

¹ Limited at high voltages by the max power output – see graph below

² Rating at 16Vin to 6 Vout, with a load of 2A.

Absolute Maximum ratings

Operation beyond these parameters may permanently damage the device

Characteristic	Min	Max
Input voltage	4.9V	36v
Output Current	0A	3A
Power dissipation		3.4W
Ambient Temperature	-20C	70C

Use

Connect your DE-SWADJ 3 to a power supply or battery and a voltmeter. Turn the worm gear attached to the potentiometer (labeled Adjust) clockwise to reduce output voltage and counterclockwise to increase it. Be sure to adjust to the desired output voltage before attaching the DE-SWADJ 3 to your application!

Overcurrent/overtemperature behavior

If the current limit has been considerably exceeded or if the device is overheated the product will gradually reduce the output voltage in an attempt to reduce the load on the device. Once the extra load is removed or the temperature is brought down, the desired output voltage will be restored. It is unlikely that you will destroy the regulator by exceeding the current/temperature ratings but we still recommend practicing good engineering techniques and do not overload the device beyond the recommended operating parameters.

Additional notes

DE-SWADJ 3 uses a 25 turn worm gear driven potentiometer and cannot wiggle loose. Do not apply glue to the voltage adjustment pot.

For best performance, mount DE-SWADJ 3 in an open space with some air flowing across it to keep it cool.



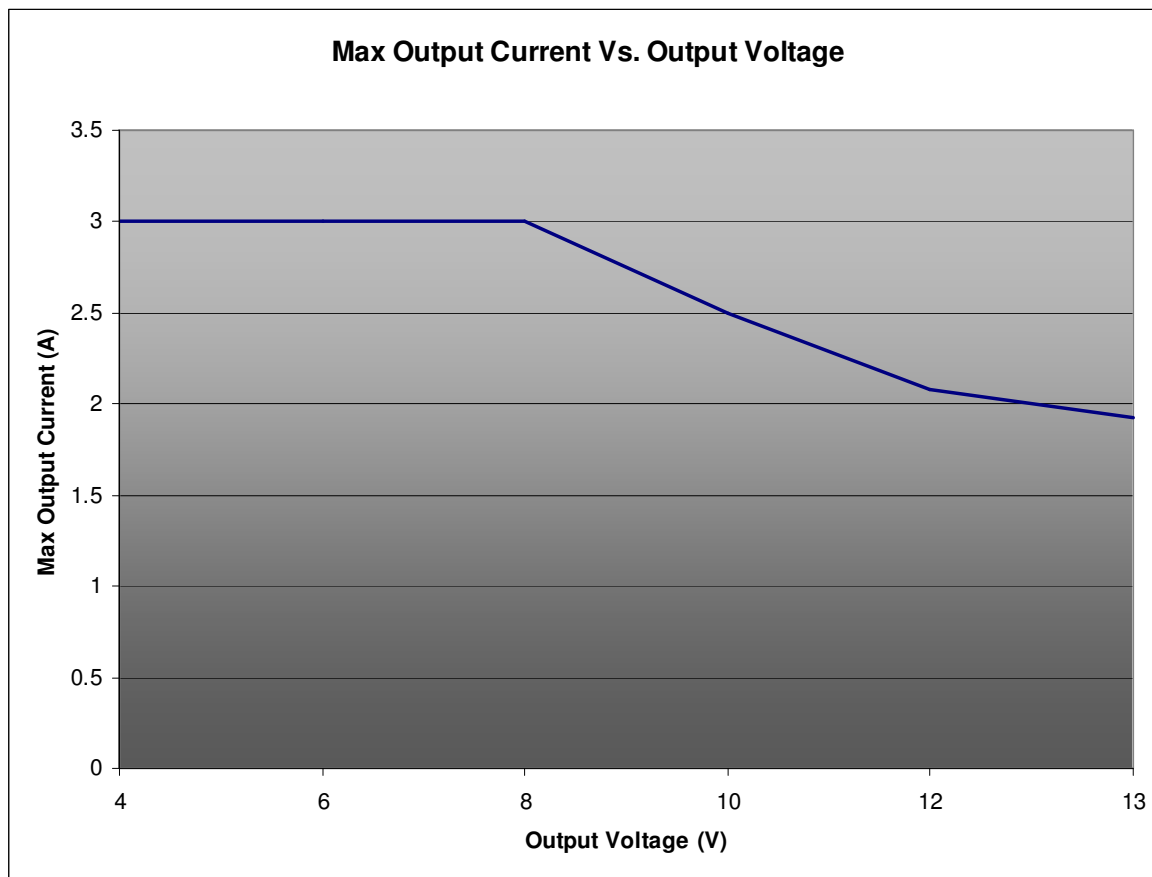



Figure 2: Efficiency vs. Input Voltage

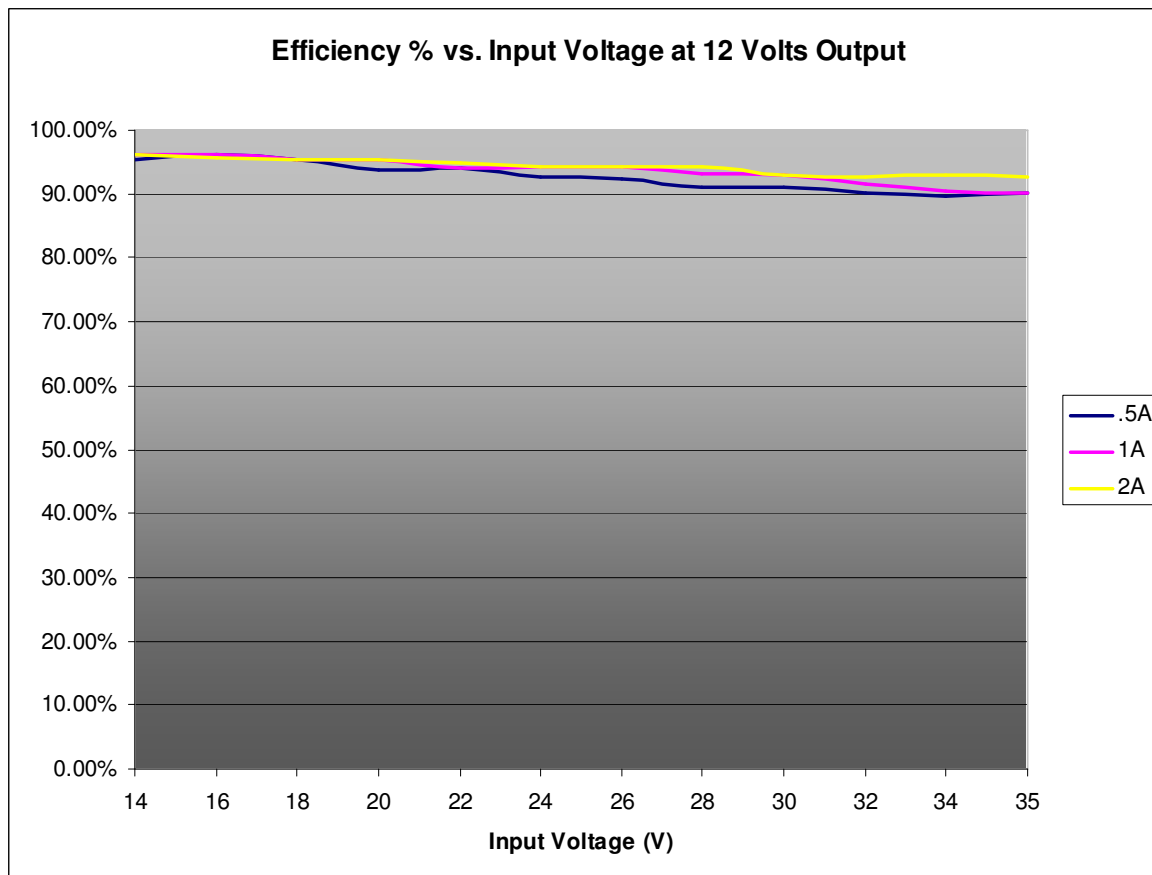

Efficiency % vs. Input Voltage at 9 Volts Output

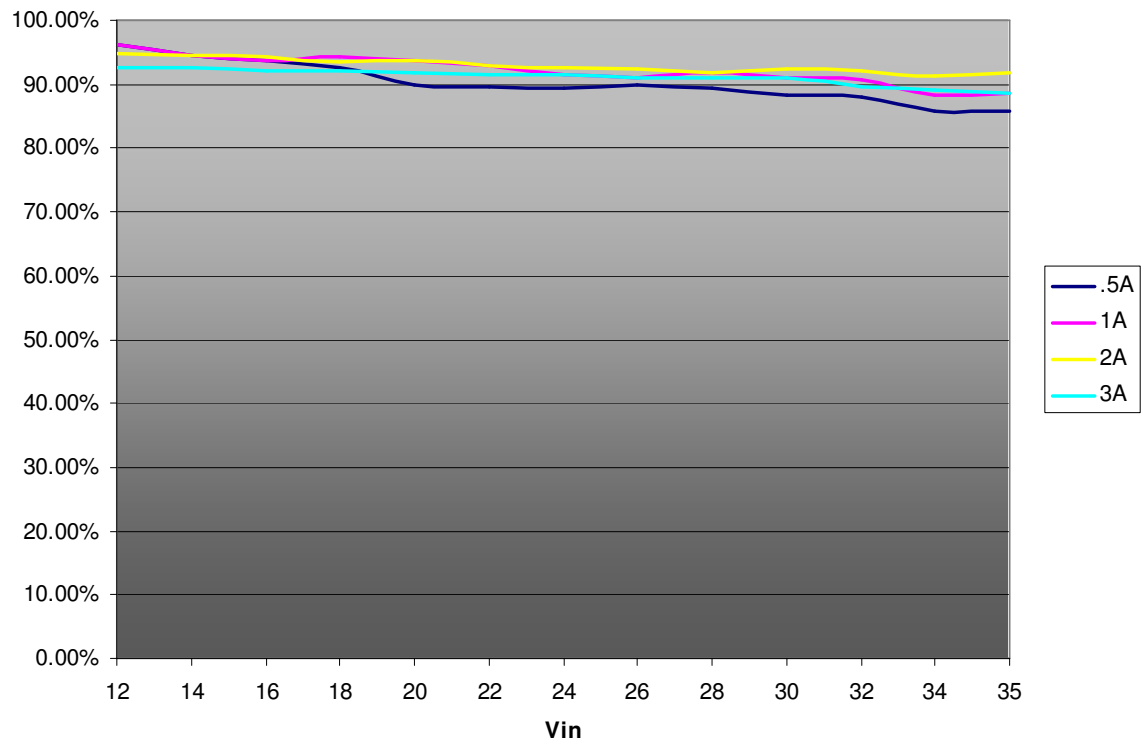

Efficiency % vs. Input Voltage at 6 Volts Output

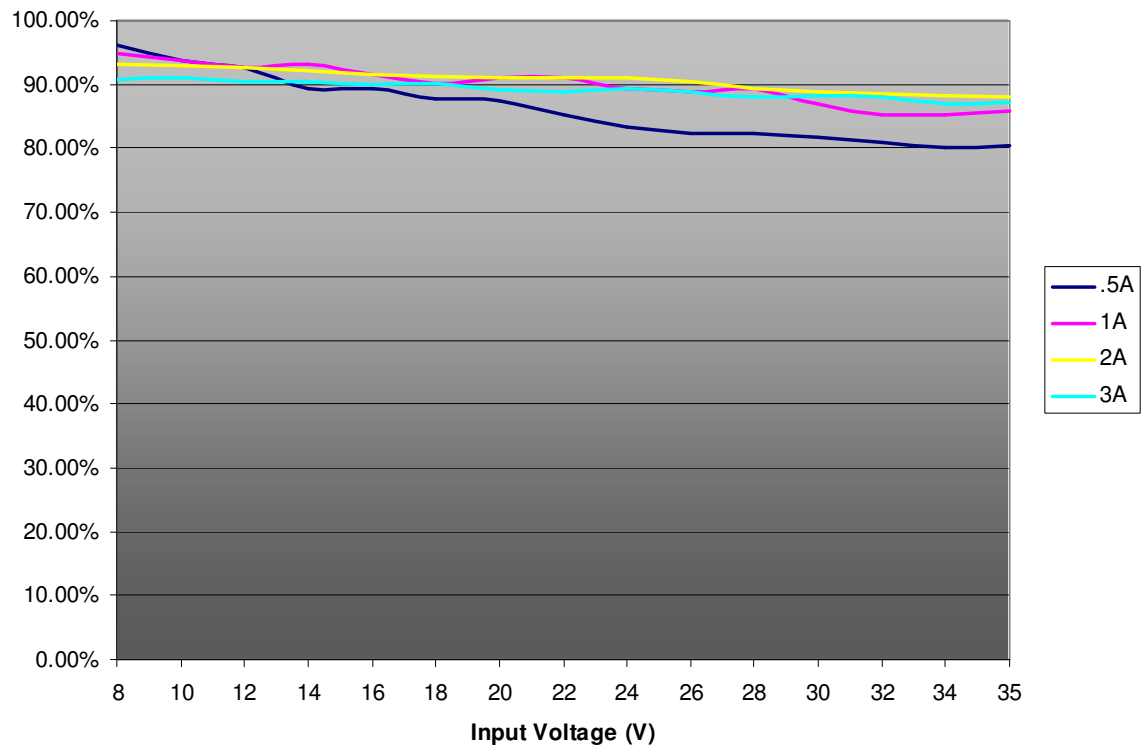

Efficiency % vs. Input Voltage at 3 Volts Output

