

RC-260RA/SA

MABUCHI MOTOR
Carbon-brush motors


OUTPUT : 0.4W~20W (APPROX)

WEIGHT : 28g (APPROX)

Typical Applications Home Appliances : Massager / Vibrator
 Toys and Models : Radio Control Model


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED r/min	CURRENT A	SPEED r/min	CURRENT A	TORQUE mN·m	TORQUE g·cm	OUTPUT W	TORQUE mN·m	TORQUE g·cm	CURRENT A
RC-260RA-18130	4.5~6.0	4.5V CONSTANT	9800	0.14	7750	0.53	1.48	15.1	1.20	7.06	72	2.00
RC-260RA-2670	3.0~4.5	4.5V CONSTANT	18500	0.30	15290	1.43	2.14	21.8	3.41	12.3	125	6.80
RC-260SA-2670	3.0~4.5	4.5V CONSTANT	13700	0.24	11520	1.27	2.66	27.1	3.20	16.7	170	6.70
RC-260SA-2295	3~6	4.5V CONSTANT	10200	0.20	8300	0.87	2.43	24.7	2.11	13.0	133	3.80

DIRECTION OF ROTATION

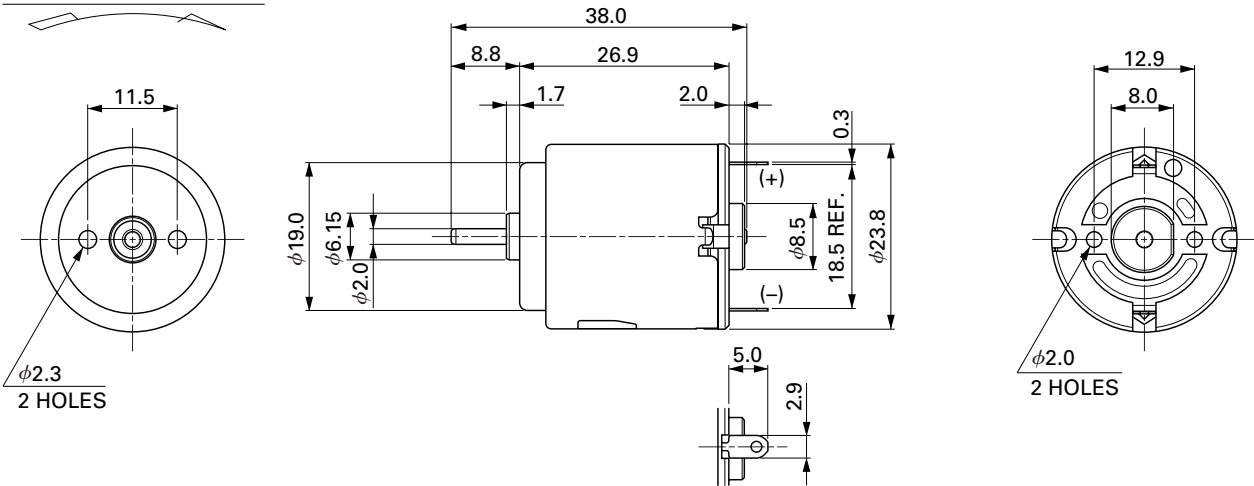

UNIT: MILLIMETERS

RC-260RA-18130 4.5V

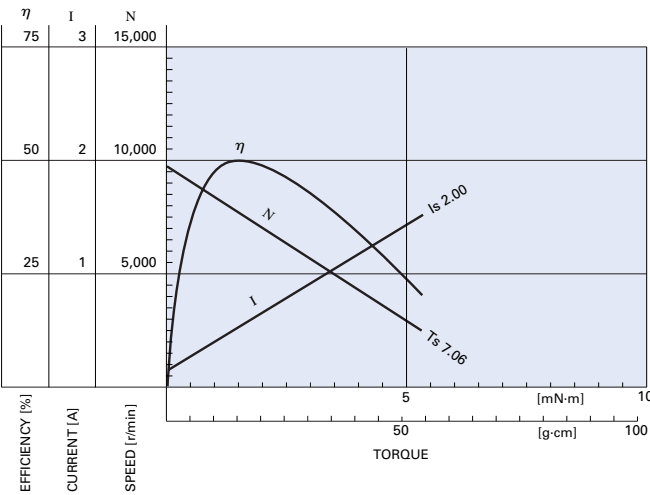

RC-260SA-2670 4.5V

