




L
17 mm [0.68 in]
17 mm [0.68 in]
19 mm [0.75 in]
21 mm [0.83 in]
21 mm [0.83 in]
23 mm [0.91 in]
23 mm [0.91 in]
25 mm [0.98 in]
25 mm [0.98 in]
27 mm [1.06 in]
27 mm [1.06 in]


Scale: 1:1







1. To get the specified scale, select 100% in print settings.

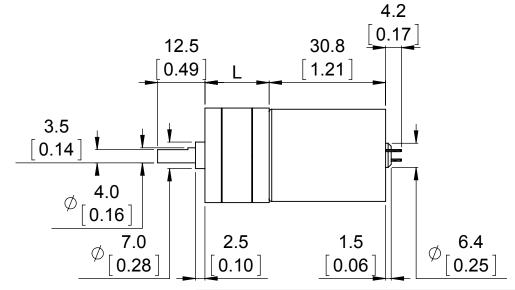

https://www.pololu.com/category/115/25d-mm-gearmotors


25D mm Metal Gearmotors (without encoders)

Drawing date:


15 January 2016


Units: mm [in] Material: **mix** 


Robotics & Electronics
© 2016 Pololu Corporation

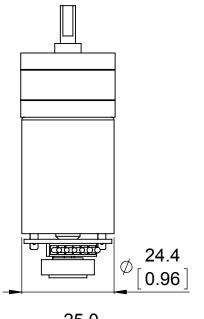

Gear ratio	L
4.4:1	17 mm [0.68 in]
9.7:1	17 mm [0.68 in]
20.4:1	19 mm [0.75 in]
34:1	21 mm [0.83 in]
47:1	21 mm [0.83 in]
75:1	23 mm [0.91 in]
99:1	23 mm [0.91 in]
172:1	25 mm [0.98 in]
227:1	25 mm [0.98 in]
378:1	27 mm [1.06 in]
499:1	27 mm [1.06 in]

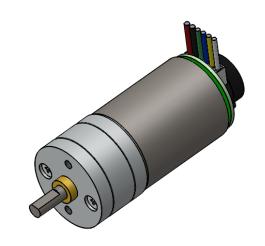

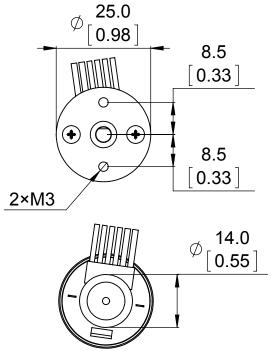

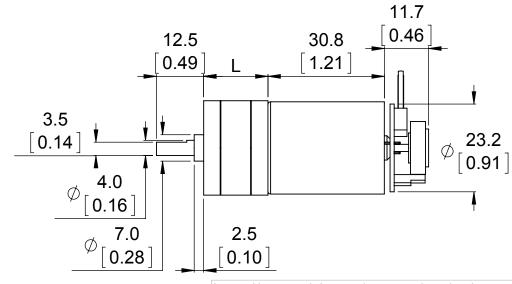

https://www.pololu.com/category/115/25d-mm-gearmotors

Name:

25D mm Metal Gearmotors (with encoders)

Drawing date:

15 January 2016

<sup>Units:</sup> mm [in]

Material: **mix** 

Robotics & Electronics
© 2016 Pololu Corporation

1. To get the specified scale, select 100% in print settings.

Scale: 1:1